

This Page Is Inserted by IFW Operations  
and is not a part of the Official Record

## **BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning documents *will not* correct images,  
please do not report the images to the  
Image Problem Mailbox.**

eg



# UNITED STATES PATENT AND TRADEMARK OFFICE

UNITED STATES DEPARTMENT OF COMMERCE  
United States Patent and Trademark Office  
Address: COMMISSIONER OF PATENTS AND TRADEMARKS  
Washington, D.C. 20231  
www.uspto.gov

APPLICATION NO.	FILING DATE	FIRST NAMED INVENTOR	ATTORNEY DOCKET NO.	CONFIRMATION NO.
09/813,988	03/22/2001	Noriko Suchiro	205040US0	2664

22850 7590 03/12/2003

OBLON, SPIVAK, MCCLELLAND, MAIER & NEUSTADT, P.C.  
1940 DUKE STREET  
ALEXANDRIA, VA 22314

EXAMINER

RUDE, TIMOTHY L

ART UNIT	PAPER NUMBER
----------	--------------

2871

DATE MAILED: 03/12/2003

Please find below and/or attached an Office communication concerning this application or proceeding.

# Office Action Summary

Application No.

09/813,988

Applicant(s)

SUEHIRO ET AL.

Examiner

Timothy L Rude

Art Unit

2871

-- The MAILING DATE of this communication appears on the cover sheet with the correspondence address --

## Period for Reply

A SHORTENED STATUTORY PERIOD FOR REPLY IS SET TO EXPIRE 3 MONTH(S) FROM THE MAILING DATE OF THIS COMMUNICATION.

- Extensions of time may be available under the provisions of 37 CFR 1.136(a). In no event, however, may a reply be timely filed after SIX (6) MONTHS from the mailing date of this communication.
- If the period for reply specified above is less than thirty (30) days, a reply within the statutory minimum of thirty (30) days will be considered timely.
- If NO period for reply is specified above, the maximum statutory period will apply and will expire SIX (6) MONTHS from the mailing date of this communication.
- Failure to reply within the set or extended period for reply will, by statute, cause the application to become ABANDONED (35 U.S.C. § 133).
- Any reply received by the Office later than three months after the mailing date of this communication, even if timely filed, may reduce any earned patent term adjustment. See 37 CFR 1.704(b).

## Status

- 1) ☒ Responsive to communication(s) filed on 10 December 2002.
- 2a) ☒ This action is **FINAL**. 2b) ☐ This action is non-final.
- 3) ☐ Since this application is in condition for allowance except for formal matters, prosecution as to the merits is closed in accordance with the practice under *Ex parte Quayle*, 1935 C.D. 11, 453 O.G. 213.

## Disposition of Claims

- 4) ☒ Claim(s) 1-21 is/are pending in the application.
- 4a) Of the above claim(s) 4,7,9 and 11-21 is/are withdrawn from consideration.
- 5) ☐ Claim(s) \_\_\_\_\_ is/are allowed.
- 6) ☒ Claim(s) 1-3,5,6,8 and 10 is/are rejected.
- 7) ☐ Claim(s) \_\_\_\_\_ is/are objected to.
- 8) ☐ Claim(s) \_\_\_\_\_ are subject to restriction and/or election requirement.

## Application Papers

- 9) ☐ The specification is objected to by the Examiner.
- 10) ☐ The drawing(s) filed on \_\_\_\_\_ is/are: a) ☐ accepted or b) ☐ objected to by the Examiner.
- Applicant may not request that any objection to the drawing(s) be held in abeyance. See 37 CFR 1.85(a).
- 11) ☐ The proposed drawing correction filed on \_\_\_\_\_ is: a) ☐ approved b) ☐ disapproved by the Examiner.
- If approved, corrected drawings are required in reply to this Office action.
- 12) ☐ The oath or declaration is objected to by the Examiner.

## Priority under 35 U.S.C. §§ 119 and 120

- 13) ☐ Acknowledgment is made of a claim for foreign priority under 35 U.S.C. § 119(a)-(d) or (f).
- a) ☐ All b) ☐ Some \* c) ☐ None of:
1. ☐ Certified copies of the priority documents have been received.
2. ☐ Certified copies of the priority documents have been received in Application No. \_\_\_\_\_.
3. ☐ Copies of the certified copies of the priority documents have been received in this National Stage application from the International Bureau (PCT Rule 17.2(a)).
- \* See the attached detailed Office action for a list of the certified copies not received.
- 14) ☐ Acknowledgment is made of a claim for domestic priority under 35 U.S.C. § 119(e) (to a provisional application).
- a) ☐ The translation of the foreign language provisional application has been received.
- 15) ☐ Acknowledgment is made of a claim for domestic priority under 35 U.S.C. §§ 120 and/or 121.

## Attachment(s)

- 1) ☐ Notice of References Cited (PTO-892)
- 2) ☐ Notice of Draftsperson's Patent Drawing Review (PTO-948)
- 3) ☐ Information Disclosure Statement(s) (PTO-1449) Paper No(s) \_\_\_\_\_
- 4) ☐ Interview Summary (PTO-413) Paper No(s). \_\_\_\_\_
- 5) ☐ Notice of Informal Patent Application (PTO-152)
- 6) ☐ Other: \_\_\_\_\_

Art Unit: 2871

## **DETAILED ACTION**

### ***Claims***

1. Claims 1, 2, and 10 are amended, necessitating new grounds of rejection.

### ***Claim Objections***

2. Claim 2 is objected to because of the following informalities: The equation for the value  $a$ , has incorrect units. Value  $a$ , is a distance measurement that cannot be expressed in terms of volts. For examination purposes, the denominator in said equation shall be interpreted as 10 volts. Appropriate correction is required.

### ***Claim Rejections - 35 USC § 103***

The following is a quotation of 35 U.S.C. 103(a) which forms the basis for all obviousness rejections set forth in this Office action:

(a) A patent may not be obtained though the invention is not identically disclosed or described as set forth in section 102 of this title, if the differences between the subject matter sought to be patented and the prior art are such that the subject matter as a whole would have been obvious at the time the invention was made to a person having ordinary skill in the art to which said subject matter pertains. Patentability shall not be negated by the manner in which the invention was made.


3. Claims 1-3, 5, 6, 8, and 10 are rejected under 35 U.S.C. 103(a) as being unpatentable over Hattori et al (Hattori) USPAT 2002/0067451 A1 in view of Morokawa et al (Morokawa) USPAT 5,654,782.

Art Unit: 2871

As to claim 1, Hattori discloses in Figure 5, embodiment one (embodiment one is at para [0081] through [0084]), a liquid crystal display (LCD) element comprising a front side substrate, 33, having a front side electrode, 31, a rear side substrate, 36, having a rear side electrode, 34, and a liquid crystal layer, 37, interposed therebetween wherein the liquid crystal layer exhibits a plurality of display states; a display state is changed by a voltage applied across the electrodes, with the electrically off state being maintained stably, the liquid crystal display element being characterized in that at least a part of the front side electrode and the front side substrate is transparent [0081]; the front side electrode is divided into a plurality of electrode regions (per Figure 5) on its substrate surface, and the thickness  $d$  ( $\mu\text{m}$ ) of the liquid crystal layer is  $6 \mu\text{m}$  [0081].

Hattori teaches the use of a chiral nematic additive to the liquid crystal to facilitate quick and reliable transition from a splay alignment to a bend alignment state (Abstract, first para). Hattori also teaches in embodiment five (para [0095] through [0105]) the use of a liquid crystal material with a chiral additive [0095] (Applicant's chiral nematic liquid crystal layer) in an LCD similar to embodiment one [0096].

Art Unit: 2871

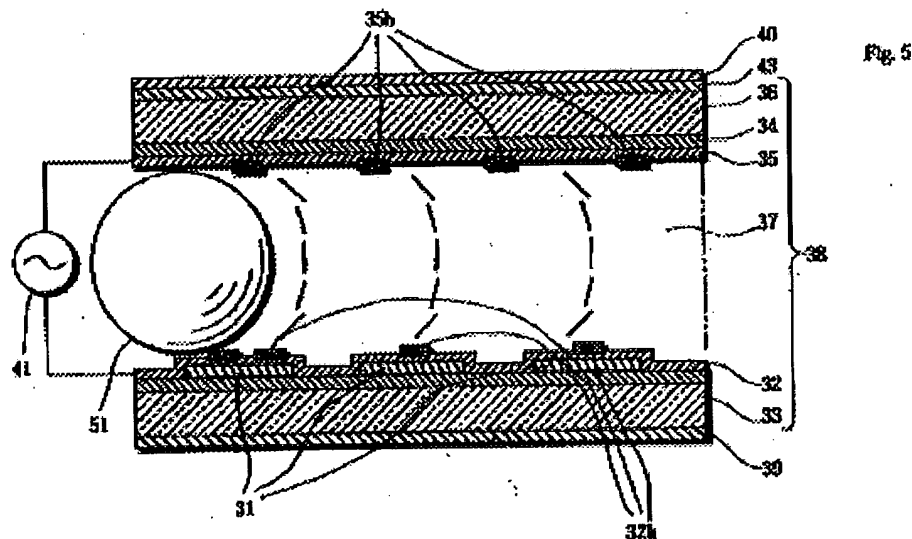

Hattori does not explicitly disclose an element wherein the maximum space  $a$  ( $\mu\text{m}$ ) between adjacent electrode regions and the thickness  $d$  ( $\mu\text{m}$ ) of the liquid crystal layer satisfy a relational formula of  $1.0 \cdot d \leq a \leq 4.0 \cdot d$ .

Morokawa teaches the use of a pixel size of 100 to 200  $\mu\text{m}$  to make the pixels non-distinct (better picture resolution, applicable and combinable with any type of liquid crystal matrix display, regardless of mode and liquid crystal material type) (col. 2, lines 24-28). Morokawa also teaches the use of gaps between adjacent pixels that are about 10% of the pixel dimension in order to obtain an aperture ratio of at least 80%. Those conditions result in  $10 \mu\text{m} \leq a \leq 20 \mu\text{m}$ .

Morokawa is evidence that ordinary workers in the art of liquid crystals would find the reason, suggestion, or motivation to combine use a pixel size of 100 to 200  $\mu\text{m}$  to make the pixels non-distinct with the LCD of embodiment 5 of Hattori. This would result in  $10 \mu\text{m} \leq a \leq 20 \mu\text{m}$  thereby satisfying  $1.0 \cdot d \leq a \leq 4.0 \cdot d$ , where  $d = 6 \mu\text{m}$ , specifically  $6 \mu\text{m} \leq a \leq 24 \mu\text{m}$ .

Art Unit: 2871

Therefore, it would have been obvious to one having ordinary skill in the art of liquid crystals at the time the invention was made to modify the LCD of Hattori with the small electrode size and spacing of Morokawa to produce a high-resolution display with non-distinct pixels.

As to claim 2, Hattori discloses an LCD as describe above.

Hattori does not explicitly disclose in embodiment one a chiral nematic liquid crystal used for the liquid crystal layer; the maximum space  $a$  ( $\mu\text{m}$ ) between adjacent electrode regions, the thickness  $d$  ( $\mu\text{m}$ ) of the liquid crystal layer, and the maximum effective voltage  $V_{\text{max}}(\text{V})$  of a voltage applied to the front side electrode and the rear side electrode satisfy a relational formula of  $1.0 \cdot d \leq a \leq d \cdot V_{\text{max}}/10$ .

Hattori teaches the use of a chiral nematic additive to the liquid crystal to facilitate quick and reliable transition from a splay alignment to a bend alignment state (Abstract, first para). Hattori also teaches in embodiment five (para [0095] through [0105]) the use of a liquid crystal material with a chiral additive [0095] in an LCD similar to embodiment one [0096].

Hattori also teaches the use of 8 volts applied [0084].

Morokawa teaches the use of a pixel size of 100 to 200  $\mu\text{m}$  to make the pixels non-distinct (better picture resolution) (col. 2, lines 24-28). Morokawa also teaches the use of gaps between adjacent pixels that are about 10% of the pixel dimension in order to obtain an aperture ratio of at least 80%. Those conditions result in  $10 \mu\text{m} \leq a \leq 20 \mu\text{m}$ .

Art Unit: 2871

Morokawa is evidence that ordinary workers in the art of liquid crystals would find the reason, suggestion, or motivation to combine use a pixel size of 100 to 200  $\mu\text{m}$  to make the pixels non-distinct with the LCD of Hattori. This would result in  $10 \mu\text{m} \leq a \leq 20 \mu\text{m}$  thereby substantially satisfying  $1.0 \cdot d \leq a \leq d \cdot V_{\text{max}}/10$ , where  $d = 6 \mu\text{m}$ , specifically  $6 \mu\text{m} \leq a \leq 19.2 \mu\text{m}$ .

Therefore, it would have been obvious to one having ordinary skill in the art of liquid crystals at the time the invention was made to modify the LCD of Hattori with the electrode size and spacing and chiral additive of Morokawa to produce a high-resolution display with non-distinct pixels and to facilitate quick and reliable transition (faster switching).

As to claim 3, Hattori discloses application of 8 V (Applicant's 48 V or less) [0084] and  $d = 6 \mu\text{m}$  (Applicant's  $2.5 \mu\text{m} \leq d \leq 6.0 \mu\text{m}$ ) [0081]. Also, the trend in the LCD industry is to move towards smaller dimensions of  $d$ .

As to claim 5, Hattori in discloses a LCD display as described above.

Hattori does not explicitly disclose in embodiment one, a display wherein at least a part of the front side electrode is stripe-like electrodes and at least a part of the rear electrode is stripe-like electrodes, said stripe-like electrodes of the front side electrode and the rear side electrode being arranged so as to be crossed in the substrate plane.

However, conventional passive matrix LCDs commonly have at least a part of the front side electrode is stripe-like electrodes and at least a part of the rear electrode is



stripe-like electrodes, said stripe-like electrodes of the front side electrode and the rear side electrode being arranged so as to be crossed in the substrate plane.

Hattori teaches that all embodiments can be made as passive matrix LCDs [0230].

Also, Morokawa discloses a passive matrix LCD wherein at least a part of the rear electrode is stripe-like electrodes, said stripe-like electrodes of the front side electrode and the rear side electrode being arranged so as to be crossed in the substrate plane in Figure 1(B).

Morokawa is evidence that ordinary workers in the art of liquid crystals would find the reason, suggestion, or motivation to combine a rear electrode wherein at least a part of the rear electrode is stripe-like electrodes, said stripe-like electrodes of the front side electrode and the rear side electrode being arranged so as to be crossed in the substrate plane to the passive LCD of Hattori to form a passive matrix display.

Therefore, it would have been obvious to one having ordinary skill in the art of liquid crystals at the time the invention was made to modify the LCD of Hattori with the crossed stripe-like electrodes of Morokawa to form a passive matrix display.

As to claim 6, Hattori discloses a LCD display as described above.

Hattori does not explicitly disclose the claimed electrode line density.

Morokawa teaches the use of a pixel size if between 100 and 200  $\mu\text{m}$  to achieve a high-resolution display with non-distinct pixels, as described in the rejection of claim 2,

Art Unit: 2871

above. This results in a disposition density  $L_d$  (number/mm) of the stripe-like electrodes that is substantially  $5 \leq L_d \leq 10$  (well within Applicant's  $2 \leq L_d \leq 15$ ).

As to claim 8, Hattori teaches the use of a rear side electrode covered with a reflective metal film to form a reflective electrode for a reflective display [0229].

As to claim 10, Hattori teaches that all of his embodiments may be applied to passive matrix devices [0230]. This would result in a dot matrix display wherein figures and characters may be displayed.

Also, Morokawa teaches the use of a passive matrix device as described in the rejection of claim 5, above.

### ***Response to Arguments***

4. Applicant's arguments filed on 10 December 2002 have been fully considered but they are not persuasive.

Applicant's ONLY arguments are as follows:

Hattori in view of Morokawa disclose only simple nematic liquid crystals.

Examiner's responses to Applicant's ONLY arguments are as follows:

Art Unit: 2871

It is respectfully pointed out that the primary reference, Hattori, discloses the use of a chiral additive (Applicant's chiral nematic liquid crystal layer) in the Abstract and in Embodiment 5, per rejections above.

### ***Conclusion***

**THIS ACTION IS MADE FINAL.** Applicant is reminded of the extension of time policy as set forth in 37 CFR 1.136(a).

A shortened statutory period for reply to this final action is set to expire **THREE MONTHS** from the mailing date of this action. In the event a first reply is filed within **TWO MONTHS** of the mailing date of this final action and the advisory action is not mailed until after the end of the **THREE-MONTH** shortened statutory period, then the shortened statutory period will expire on the date the advisory action is mailed, and any extension fee pursuant to 37 CFR 1.136(a) will be calculated from the mailing date of the advisory action. In no event, however, will the statutory period for reply expire later than **SIX MONTHS** from the mailing date of this final action.

Any inquiry concerning this communication or earlier communications from the examiner should be directed to Timothy L Rude whose telephone number is (703) 305-0418. The examiner can normally be reached on Monday through Thursday.

Art Unit: 2871

If attempts to reach the examiner by telephone are unsuccessful, the examiner's supervisor, Robert H Kim can be reached on (703) 305-3492. The fax phone numbers for the organization where this application or proceeding is assigned are (703) 746-8745 for regular communications and (703) 308-7725 for After Final communications.

Any inquiry of a general nature or relating to the status of this application or proceeding should be directed to the receptionist whose telephone number is (703) 305-4900.

Timothy L Rude  
Examiner  
Art Unit 2871

TLR  
March 10, 2003

SC  
TECHNICAL CENTER  
2003